




Nedo Flexi Rods

Simply read off the direct reading scale.
When levelling with a rotating laser, the Flexi Rod is the ideal accessory for determining differences in heights quickly, exactly and correctly signed.

Features:

- Robust Flexi Rod made of anodised aluminium tubes
- Abrasion-resistant graduation
- Bubble for vertical alignment of the Flexi Rod
- Sliding adapter with screw clamp
- Quick clamp to securely lock the extension
- Inclusive case
- Length: 1.31 m - 2.42 m

Ref.-No.
360 916-637

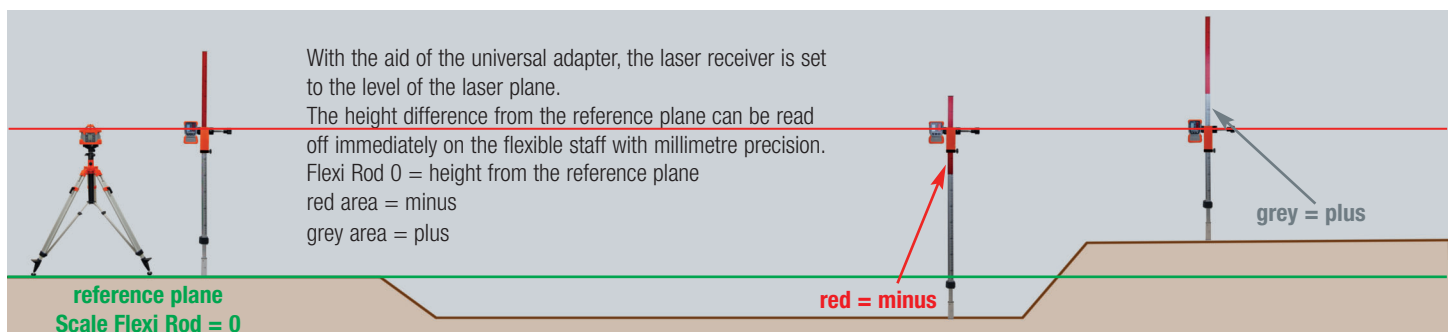

Technical data subject to change



Precise surveying and measuring

Nedo GmbH & Co. KG
Hochgerichtstrasse 39-43
D-72280 Dornstetten

Phone +49 (0) 7443 24 01-0
Fax +49 (0) 7443 24 01-45

info@nedo.com www.nedo.com